



Picture is a representation of actual product.

Approvals




Order Information

Load Rating	Part #	Est. Weight	Price
7 kg	202686	2 lb	Consult
10 kg	202687	2 lb	Consult
30 kg	202688	2 lb	Consult
60 kg	202689	2 lb	Consult
100 kg	202690	2 lb	Consult
150 kg	202691	2 lb	Consult

Dimensions

Rated Capacity	A	B	C	D	E	F	G
kg/mm							
7 to 10	18.2	140.0	19.0	6.4	88.9	1/4-20 UNC	30.0
30 to 60	24.5	140.0	19.0	6.4	88.9	1/4-20 UNC	30.0
100 to 150	30.8	140.0	22.4	7.8	79.3	3/8-16 UNC	30.0

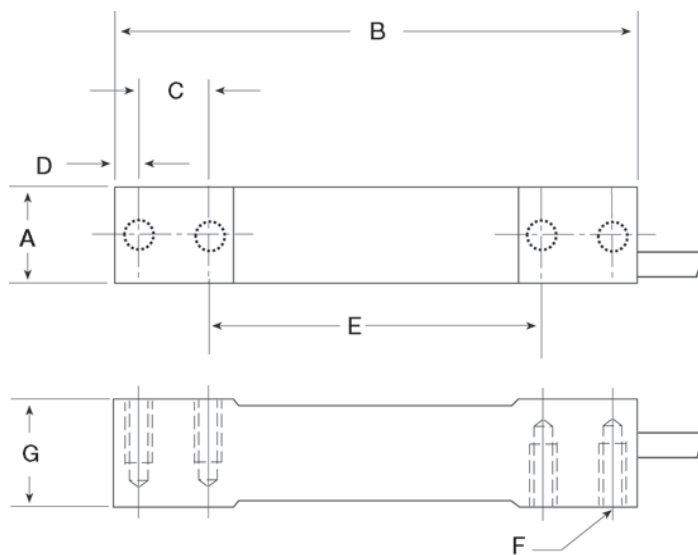

Interchangeable Products

RICE LAKE WEIGHING SYSTEMS

RL1380..... page 164

HBK

PWS..... page 231

Specifications

Full Scale Output:

2 mV/V

Output Resistance:

350 (± 10) ohm

Input Resistance:

385 (± 15) ohm

Material Finish:

Stainless Steel

Temperature Compensation:

Compensated Range
14 °F to 104 °F (-10 °C to 40 °C)
Operating Range
0 °F to 150 °F (-18 °C to 65 °C)

Seal Type:

Environmentally Sealed, IP67

Safe Overload:

150% full scale

Rated Excitation:

5 to 10 VDC

Insulation Resistance:

5,000 megohm

Max Platform Size:

7 to 30 kg: 350 × 350 mm
60 to 150 kg: 450 × 450 mm

Combined Error:

0.02% full scale

Cable Length:

10 ft

Cable Diameter:

0.140 in
Polyurethane jacket

Color Code:

Green +Excitation
Black -Excitation
White +Signal
Red -Signal
Yellow Shield

Warranty:

One-year limited

Approvals:

FM
NTEP
OIML