



Picture is a representation of actual product

**Approvals**



Available upon request


Available upon request

**Order Information**

Load Rating	Part #	Est. Weight	Price
1,000 kg	29908	9 lb	Consult
1,500 kg	29909	9 lb	Consult
2,000 kg	29910	9 lb	Consult

**Dimensions**

Rated Capacity	H	H1	H2	L	L1	T	W	W1
kg/mm								
1,000 to 2,000	126.0	95.0	45.0	176.0	135.0	M16 × 2-6H	76.0	46.0

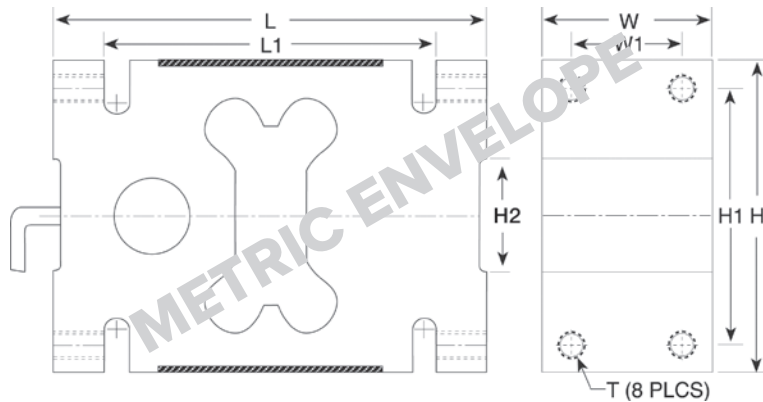

**Specifications**

**Full Scale Output:**  
2.0 mV/V

**Output Resistance:**  
350 (± 3) ohm

**Input Resistance:**  
415 (± 15) ohm

**Material/Finish:**  
Aluminum alloy

**Temperature:**  
Compensated range  
14 °F to 104 °F (-10 °C to 40 °C)  
Operating range  
0 °F to 150 °F (-18 °C to 65 °C)

**Seal Type:**  
Environmentally sealed, IP66

**Safe Overload:**  
150% full scale

**Rated Excitation:**  
5 to 10 VDC (15 V maximum)

**Combined Error:**  
0.02% full scale

**Insulation Resistance:**  
2,000 megohm

**Deflection at Capacity:**  
0.015 in

**Max. Platform Size:**  
4 × 4 ft

**Cable Length:**  
5 m

**Cable Diameter:**  
0.220 in  
Polyurethane jacket

**Cable Color Code:**  
Green +Excitation  
Black -Excitation  
Red +Signal  
White -Signal  
Blue +Sense  
Brown -Sense

**Warranty:**  
One-year limited

**Approvals:**  
cFMus  
NTEP  
Ex (Available upon request)  
OIML (Available upon request)